

INNOVATION LEADS TO VALUE



SUNWARD

SL06W WHEEL LOADER

◆ Rated power/speed: 18,2 kW/2400rpm

◆ Standard bucket capacity: 0,26 m³

◆ Rated load capacity : 600 kg



CONFIGURATION

Canopy

Electric Work Control

0.26 (Detachable Shovel Teeth)

Floating Function

Quick Hitch

Triple Mechanical Operation

Pressure Measuring Valve

OPTIONAL

Rops & Fops Cabin With Maintenance Port

Log Grasper



Goods Grasper

Heater

Cold Start Device

Radio

Mp3

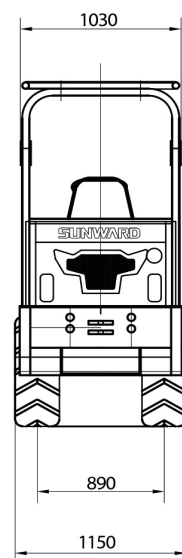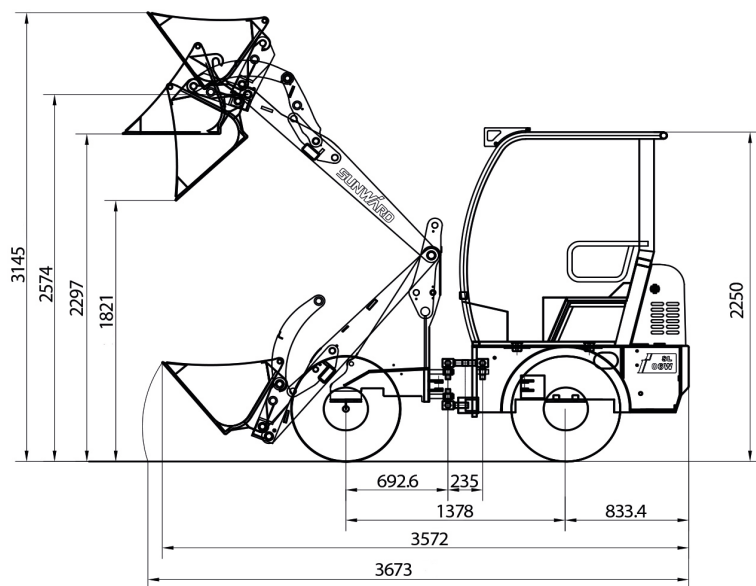

Vehicle parameters

Overall Length (bucket on ground)	3673 mm
Overall Width	1150 mm
Overall Height	2250 mm
Bucket capacity	0,26 m ³
Rated load	600 kg
Overall Weight	1700 kg
Max. Breakout Force	13 kN
Max. Tractive Force	16.7 kN
Max. Dumping height	1821 mm
Max. Dumping reach	829 mm
Min. ground clearance	220 mm
Wheelbase	1378 mm
Wheel tread	890 mm
Tyre	26*12.12

Engine

Manufacturer/model	KUBOTA D1705 (Euro5/EPA4)
Rated Power	18,2 kW
Rated Speed	2400 rpm

Transmission System

Type	Hydrostatic
Shift gear control Type	Electric, Stepless
Travel speed	12

Bucket

Bucket width	1200 mm
Bucket type	Heavy-duty bolt on teeth

Operating System

Steering system	Full Hydraulic
Min. turning radius	2466 mm
Driving system	Hydrostatic driving, 4WD

Brake System

Service Brake	Hydrostatic brake
Parking Brake	Drum brake

