

INNOVATION LEADS TO VALUE



SWE 90UF-2PB MINI EXCAVATOR

◆ Total weight: 9.6 t

◆ Engine power: 46.2 kW / 2 200 rpm

◆ Bucket capacity: 0.26 m³



- ◆ It is a multi-functional tail-less construction equipment with excellent appearance and flexible deflection and tail-less construction performance, improving construction efficiency in small spaces.
- ◆ The new comfortable cabin is upgraded with intelligent control devices, one-key start function, and 7-inch touch screen, and the equipment information could be known at any time.
- ◆ Electric proportional handle is provided to control auxiliary tools more accurately. The flow of auxiliary tools could be adjusted for more applications with better coordinated operations.
- ◆ The covered parts could be opened widely and the platform edges could be removed to facilitate internal inspection and maintenance.
- ◆ The two-section moving arm could move in a large range with multi-functional tools for construction under different working conditions.


TECHNICAL PARAMETERS



SWE 90UF-2PB


Parameters and performance of the main machine

Dimension (L*W*H)	mm	6 535 x 2 270 x 2 735	
Operating weight	t	9.6	
Standard bucket capacity	m ³	0.26	
Bucket digging force	kN	63.5	
Arm digging force	kN	38	
Max. drawbar pull	kN	71	
Travel speed (Max/Min)	km/h	4.7 / 2.7	
Gradeability	%	70	
Ground pressure	kPa	41.2	
Slewing speed	rpm	10	
Engine	Brand	YANMAR	
	Model	4TNV98C-SSU(Euro V/ US IV)	
	Max. torque	N.m/rpm	241 / 1 430
	Displacement	L	3.3
	Power/Rotation speed	kw/rpm	46.2 / 2 200
Fuel tank capacity	L	120	
Primary pump	Type	1 variable plunger pump	
	Flow rate	L/min	158.4
Pressure of main relief valve	MPa	28	
Hydraulic oil tank capacity	L	80	

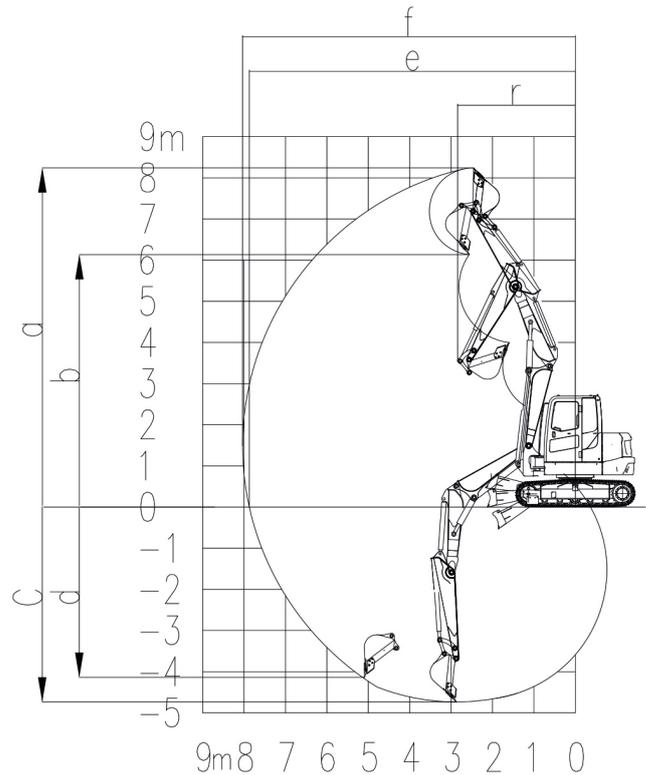

Working range

	Boom length	mm	1 950 + 2 050
	Arm length	mm	2 100
a	Max. digging height	mm	8 240
b	Max. dumping height	mm	6 135
c	Max. digging depth	mm	4 735
d	Max. vertical digging depth	mm	4 140
e	Max. digging reach	mm	8 035
f	Max. digging reach at ground level	mm	7 875
g	Max. lift height of the dozer blade	mm	450
h	Max. digging depth of dozer blade	mm	485
r	Min. swing radius	mm	2 840

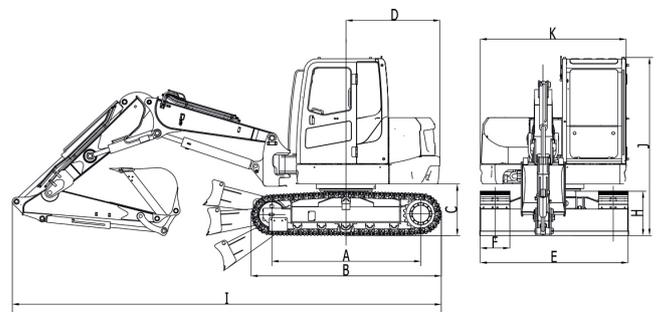

Outline dimensions

A	Length to center of rollers	mm	2 270	G	Chassis ground clearance	mm	400
B	Total track length	mm	2 900	H	Track height	mm	678
C	Counterweight clearance	mm	800	I	Total length	mm	6 535
D	Platform tail slewing radius	mm	1 430	J	Max. height of cab	mm	2 735
E	Track width	mm	2 250	K	Uppercarriage width	mm	2 220
F	Track shoe width	mm	450				

◆ The above parameters may be different due to product upgrading.

